



DIBITEN Poly/4.5 CR G

Premium, Polyester-Reinforced, APP Reflective Mineral-Surfaced Cool Roof Cap or Flashing Sheet

Meets the requirements of ASTM D 6222, Type I, Grade G

Features and Components


DIBITEN Poly/4.5 CR G is used as a polyester-reinforced cool roof cap or flashing sheet in APP multi-ply roofing systems.

Reflective Roofing Granules: Specifically engineered for high reflectivity, durability and optimal embedment in the APP modified bitumen sheet. Each pallet of Dibiten Poly/4.5 CR G contains three bags of CR G granules to dress-up bleed out.

APP (Atactic Polypropylene) Polymer and Asphalt Blend: Provides an extremely durable sheet with excellent weathering characteristics, flexibility and dimensional stability for ease of handling and quick installations.

Polyester Reinforcement Mat: Provides bidirectional glass-scrim reinforcement and offers robust tear strength and puncture resistance, allowing for high wind performance and excellent hail rating. The sheet also exhibits strong dimensional stability and enhanced elongation.

Polyolefin Burn-Off Film: Promotes ease of heat welding.

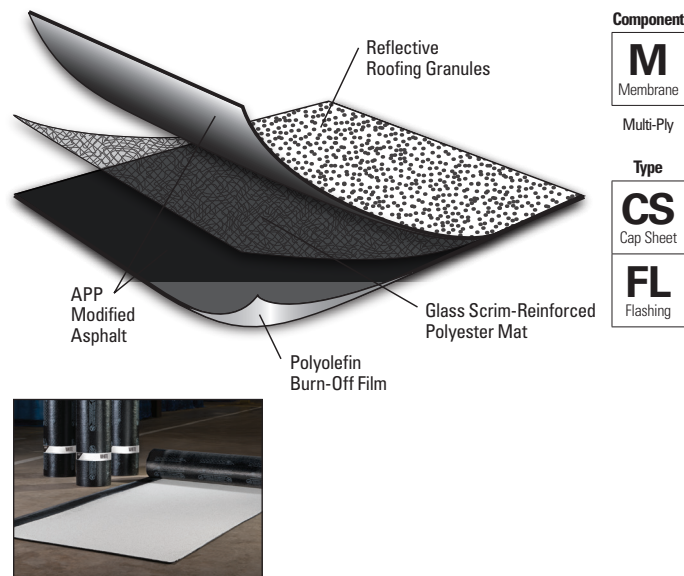

Colors: Bright White only

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
Compatible with the selected Multi-Ply systems above								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
Do not use in Single Ply systems							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

	Test	Initial	3-Year Aged**
CRRCC**	Reflectivity (ASTM C 1549)	0.72	0.67
	Emissivity (ASTM C 1371)	0.89	0.89
	Rated Product ID: 0662-0042a Licensed Manufacturer ID: 0662 Classification: Production Line		
LEED®	Solar Reflectance Index (SRI) - E 1980	88	81
	Recycled Content	0%	

* Cool Roof Rating Council ratings are determined for a fixed set of conditions, and may not be appropriate for determining seasonal energy performance. The actual effect of solar reflectance and thermal emittance on building construction may vary. Manufacturer of product stipulates that these ratings were determined in accordance with the applicable Cool Roof Rating normal procedures.

** Tested in accordance with Rapid Ratings D7897.

Peak Advantage® Guarantee Information

Systems	Guarantee Term
Dependent on system*	Up to 20 years

*Contact JM Technical Services for specific system requirements or guarantee terms.

Codes and Approvals



Title 24
This product meets California Title 24 reflectivity & emissivity requirements.

Product Application



Heat Weld

Refer to JM APP modified bitumen specifications and detail drawings for application and slope information.

Packaging and Dimensions

Roll Width	39 3/8" (1 m)
Roll Length	32' 10" (10.01 m)
Roll Coverage*	95.8 ft ² (8.9 m ²)
Roll Weight	108 lb (49 kg)
Rolls per Pallet	20
Pallets per Truck**	21

*Assumes a 4" side lap.

** Assumes a 48' flatbed truck.

Refer to the Safe Use Instructions and product label prior to using this product. The Safe Use Instructions are available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.



DIBITEN Poly/4.5 CR G

Premium, Polyester-Reinforced, APP Reflective Mineral-Surfaced Cool Roof Cap or Flashing Sheet

Meets the requirements of ASTM D 6222, Type I, Grade G

Tested Physical Properties

Physical Properties		ASTM Test Method	Standard for ASTM D 6222, Type I, Grade G	DIBITEN Poly/4.5 CR G		
				MD*	XMD**	
Strength	Tear Resistance @ 73.4° F	D 4073 / 5147	≥ 70 lbf	114 lbf	85 lbf	
	Peak Load at 0°F (-18°C)	D 5147	≥ 60 lbf/in-width	133 lbf/in-width	107 lbf/in-width	
	Peak Load at 73.4°F (23°C)	Unconditioned	D 5147	≥ 50 lbf/in-width	83 lbf/in-width	63 lbf/in-width
		90-Day Heat Conditioned	D 5147 / 5869	≥ 50 lbf/in-width	102 lbf/in-width	67 lbf/in-width
Longevity	Low Temp. Flexibility @ 180° on 1" Mandrel (Pass-Fail)	Unconditioned	D 5147	Pass		
		90-Day Heat Conditioned	D 5147 / 5869	Pass		
	Low Temperature Unrolling (Pass-Fail) Unroll in 4-6s; Visual Inspection in "unrolled" position	D 5636	Pass @ 41° F "none of the specimens show cracking"	Pass		
	Compound Stability - 2 hr 15 min @ 230° F (Pass-Fail)	D 5147	Pass "no failures showing signs of flowing, dripping, or drop formation"	Pass		
	Granule Loss	D 4977/5147	2 g (0.07 oz)	1.8 g (0.06 oz)		
	Thickness	D 5147	≥ 160 mils	160 mils		
	Bottom Coating Thickness	D 5147	≥ 30 mils	53 mils		
	Water Absorption - water by distillation	D 5147 / 95	≤ 3.2 %	0.6%		
	Moisture Content - water by distillation	D 5147 / 95	≤ 1 %	0.2%		
	Ultimate Elongation at 73.4° F	D 6222	≥ 30 %	53%	62%	
	Elongation at Peak Load @ 0° F			≥ 10 %	12%	10%
Elongation at Peak Load @ 73.4° F		Unconditioned	D 5147	≥ 23 %	51%	59%
		90-Day Heat Conditioned	D 5147 / 5869	≥ 23 %	41%	32%
Installation	Dimensional Stability - 24 hr @ 176° F	D 5147 / 1204	≤ 1 %	0.20%	0.05%	
	Net Mass per Unit Area	D 146	≥ 85 lb/100 ft ²	97 lb/100 ft ²		

*MD = Machine Direction

**XMD = Cross-Machine Direction

Note: All data represents tested values.